




MAG RELEASE by Stay-tech

Installation instructions

PACKAGE CONTAINS

1. Mag release button 1 pcs
2. Screw ISO 10642 M3x8 1 pcs

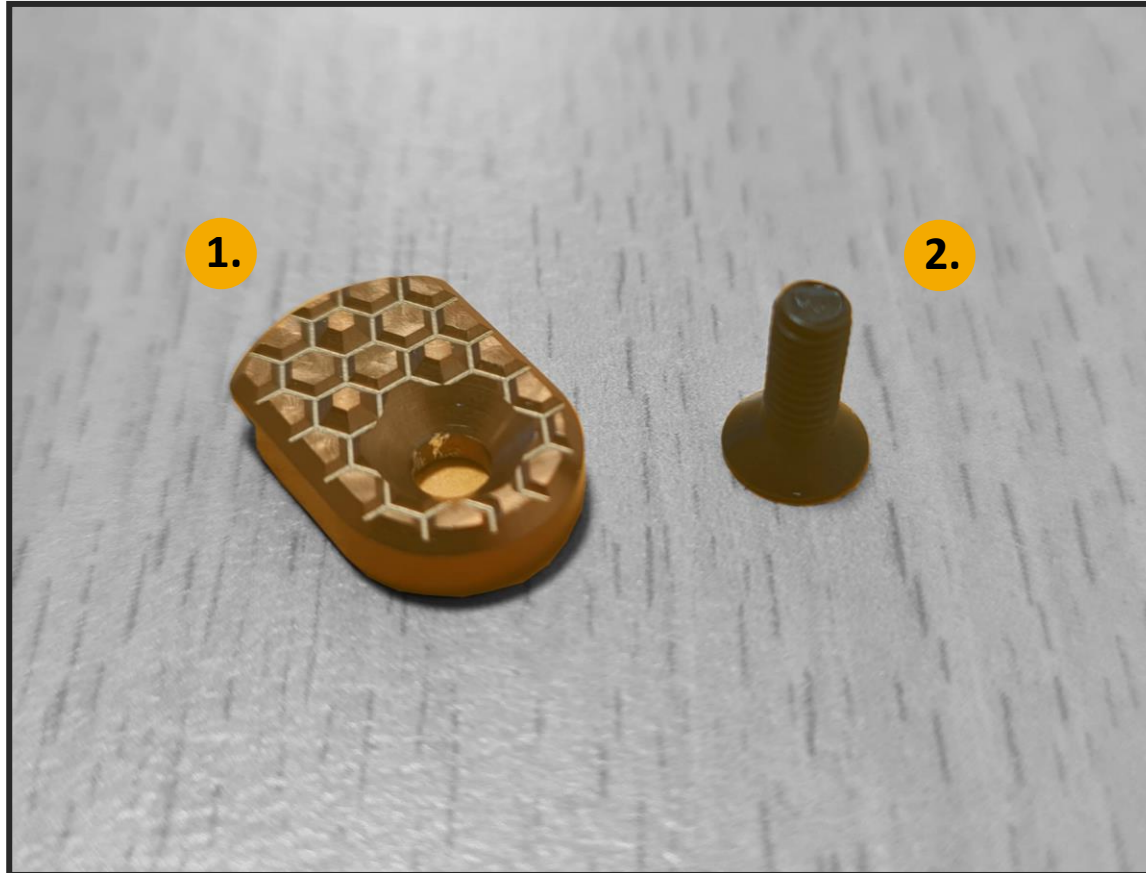

TOOL NEEDED

Basic tools:

1. Torx wrench size T10
2. Hex wrench size 2



Recommended tools:

1. Torx bit size T20
2. Hex bit size 2
3. Torque screwdriver
4. Medium-strength threadlocker (e.g. Loctite 243)



STEP 01

Original Mag release button removal



Untighten the screw that holds the original mag release button in place.



After you have removed the screw, also remove the Mag release button in direction as shown in the picture.



Make sure that the firearm is empty during installation and functionality check procedure. Separate magazines and ammo from firearms and place them away from the installation area. For any injuries during installation Stay-tech company will not hold responsibility.

STEP 02

Stay-tech Mag release button installation



Place the Stay-tech Mag release button on the position and align it on one of the three chosen positions.



Place the fixation screw into the hole. You can choose between the original one and the screw that is included into package. According to the selected screw, choose the proper bit.

STEP 03

Stay-tech Mag release button installation



Tighten the chosen screw with the selected tool
(Wrench / Torque screwdriver).



In this step, we recommend using a medium-strength threadlocker for screw fixation and a Torque screwdriver to prevent damage of parts and screw. Do not exceed the maximum tightening torque 1,2Nm.

STEP 03

Inspection of installed parts



After installation of Stay-tech Mag release button, check alignments and orientations. There should be no collision with other parts of the firearm.

After correct installation has been ensured, check the functionality of the firearm according to the pistol manufacturer. Now you are ready for a new shooting experience with Stay-tech parts.

WARNING



Make sure that the firearm is empty during installation and functionality check procedure. Separate magazines and ammo from firearms and place them away from the installation area.



For any injuries during installation or any injuries during improper usage of firearms and Stay-tech parts, the Stay-tech company will not hold responsibility.



After installation of Mag release button by Stay-tech check:

- the functionality of a firearm,
- if all safeties are still working,
- if usage of firearm is still safe with respect to all safety precautions.



It is recommended that periodic inspections especially before and after shooting are made to ensure that screw is tightened.



The company Stay-tech as a manufacturer of parts and supplier cannot be held responsible for damage on products, all involved parts, and damage on firearms that are incorrectly installed, inappropriately used, or installed not according to instructions.



Parts of Mag release button by Stay-tech that have been damaged during usage should be entirely replaced with new parts or partially with suitable spare parts from Stay-tech.



The tightening torque for the screw should not exceed a maximum 1,2Nm. Otherwise, the head of the screw, thread, or parts can be damaged.



With usage of products made by the company Stay-tech all users:

- agree with terms and conditions,
- confirms that all safety precautions will be respected,
- use the products at their own risk.



STAY BRAVE, STAY SAFE.