

PISTOL GRIPS by Stay-tech

Installation instructions

INTRO

δ STAY-TECH

PACKAGE CONTAINS

Left part of pistol grips

1 pcs 1 pcs

Right part of pistol grips

9pcs

Weights for grips

2 pcs


each approx. 8g

Weights for grips 2 pcs

each approx. 8g

each approx. 8g 2 pcs



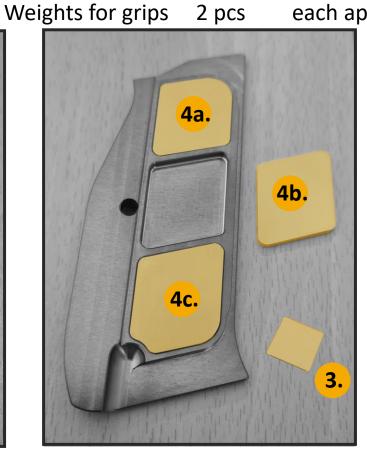

INTRO



TOOL NEEDED

Basic tool:

1. Torx wrench size T20



Recommended tool:

- 1. Torx bit size T20
- 2. Torque screwdriver
- 3. Medium-strength threadlocker (e.g. Loctite 243)



S T ∧ Y - T E C H

STEP 01

Original pistol grip removal (right side)





Untighten the screw that holds the original pistol grip in place (right side of pistol).

After you have removed a screw, push the pistol grip in direction as shown in the picture.



Make sure that the firearm is empty during installation and functionality check procedure. Separate magazines and ammo from firearms and place them away from the installation area. For any injuries during installation Stay-tech company will not hold responsibility.

S T ∧ Y - T E C H

STEP 02

Left part of Stay-tech pistol grip installation



After you have completely removed the original pistol grip, prepare left part of the Stay-tech pistol grip. Make sure that you install choosen configuration of weights.

Fixate weights with double sided tape stickers.



Align pistol grip onto the body and push it in arrow direction. Slight pressure during tightening (see next step) in the arrow direction helps align the grip onto the body.



STEP 03

Left part of Stay-tech pistol grip installation





Place the fixation screw into the hole and tighten it with choosen tool (Hex wrench / Torque screwdriver).

Follow the same procedure to change the pistol grip on another side.




In this step, we recommend using a medium-strength threadlocker for screw fixation and a Torque screwdriver to prevent damage of parts and screw. Do not exceed the maximum tightening torque 1,2Nm.


STAY-TECH

STEP 04

Inspection of installed parts





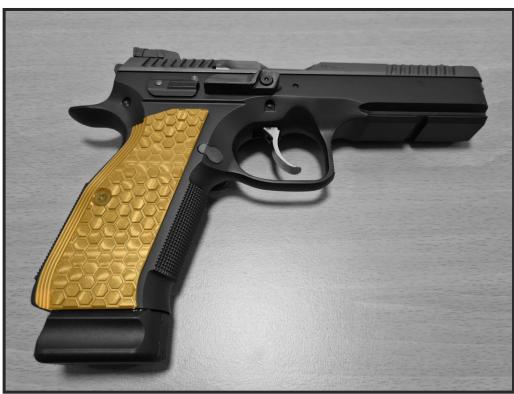

After correct installation has been ensured, check the functionality of the firearm according to the pistol manufacturer. Now you are ready for a new shooting experience with Stay-tech parts.

WARNING





Make sure that the firearm is empty during installation and functionality check procedure. Separate magazines and ammo from firearms and place them away from the installation area.



For any injuries during installation or any injuries during improper usage of firearms and Stay-tech parts, the Stay-tech company will not hold responsibility.

After installation of Pistol grips by Stay-tech check:



- the functionality of a firearm,
- if all safeties are still working,
- if usage of firearm is still safe with respect to all safety precautions.



It is recommended that periodic inspections especially before and after shooting are made to ensure that screw is tightened.



The company Stay-tech as a manufacturer of parts and supplier cannot be held responsible for damage on products, all involved parts, and damage on firearms that are incorrectly installed, inappropriately used, or installed not according to instructions.



Parts of Pistol grips by Stay-tech that have been damaged during usage should be entirely replaced with new parts or partially with suitable spare parts from Stay-tech.



The tightening torque for the screw should not exceed a maximum 1,2Nm. Otherwise, the head of the screw, thread, or parts can be damaged.



When installing and removing the weights into the grip, be careful not to damage the grips or weights. Keep in mind that each weight weighs approximately 8g.

With usage of products made by the company Stay-tech all users:



- agree with terms and conditions,
- · confirms that all safety precautions will be respected,
- use the products at their own risk.



STAY BRAVE, STAY SAFE.